

AIRSTREAM A/VAN STANDARD SPECIFICATIONS

- Aluminum finish.
- Aluminum die cast and extruded structural members.
- Extruded aluminum rub rails.
- Removable body sections.
- Integral drip moldings.
- Lined and insulated roof.
- Tinted safety glass windshields.
- Tinted corner window glass.
- Sliding cab doors with frictionless rollers.
- Positive door seals.
- Automotive type roll-up window in driver's door.
- Insulated inside engine cover.
- Multi-speed electric windshield wipers and washers.
- 40,000 BTU heater and defroster.
- Pedestal type driver's seat (forward tilting four-way adjustable).
- Seat belts.
- Tread plate stepwells.
- Heavy duty tread plate rear bumper with step.
- Tread plate removable transmission cover.
- Driver's fresh air vent.
- Heavy duty hardware and keyed locks on all doors.
- Dome light in cab area.
- Two outside rearview mirrors.
- All wiring in loom.
- 38" wide double opening rear doors with heavy duty strap hinges with windows.
- Door keepers.
- .125" thick aluminum alloy floor in load area.
- I.C.C. marker lights and reflectors.
- .040" one piece aluminum roof.
- Heavy steel corner guards on rear bumpers.
- Aluminum extrusions along bottom of body panel.
- Fully undercoated wheel wells and firewall.
- Heavy duty aluminum crossmembers.




AIRSTREAM A/VAN OPTIONAL EQUIPMENT

- Full opening overhead roll-up rear door.
- Full opening rear door, 2-piece, hinged with windows.
- Skylight power roof vent.
- Static roof vent.
- Rear door vent.
- Passenger seat with safety belt.
- Jump seat.
- Tread plate floor.
- Aluminum, steel, plywood lining, pegboard and insulation.
- Metal or plywood partitions.
- Sliding window.
- Roll-up automotive type window (curb side).
- West Coast mirrors.
- Velvac mirrors.
- Cargo floodlights.
- Dome lights.
- Custom racks.
- Doorless driver's side.
- Sun visors.
- Rear wheel rubber fenders.
- Heavy duty front bumpers.
- Full opening hinged 4-piece rear door with glass.
- Clear Plastikote finish for all-aluminum body.
- Spare tire carrier.
- Wheel housing alterations.
- Mud flaps.
- Grille guard on front bumpers.
- Deluxe driver's seat.

SPECIAL FLEET OPTIONS AVAILABLE ON REQUEST.

AIRSTREAM A/VAN BODY SPECIFICATIONS

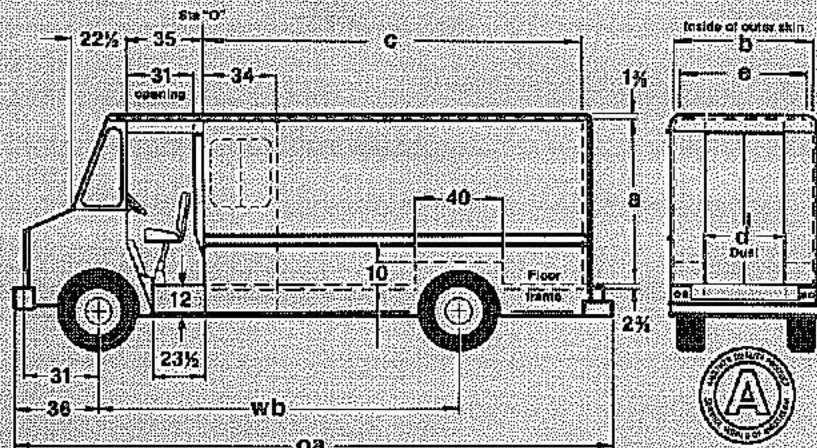

Body Code ¹	Load Area ²		Length (c) ³ feet	Between Wheel Wells (d) ⁴ inches	Between Door Pockets (e) inches	Capacity minimum cubic feet	Chassis Group ⁵	O/A Length (oa) feet
	Height (a) inches	Width (b) Inches						
A	73	78 1/4	10	42	72	380	B	18' 3"
			12	42	72	450	C	20' 3"
			14	42	72	539	D	22' 3"
			15	42	72	579	D	23' 3"
			16	42	72	618	D	24' 3"
B	73	86 1/4	10	42	80	418	B	18' 3"
			12	42	80	506	C	20' 3"
			14	42	80	593	D	22' 3"
			15	42	80	637	D	23' 3"
			16	42	80	680	D	24' 3"
C	81	78 1/4	10	42	72	422	B	18' 3"
			12	42	72	510	C	20' 3"
			14	42	72	598	D	22' 3"
			15	42	72	642	D	23' 3"
			16	42	72	686	D	24' 3"
D	81	86 1/4	10	42	80	465	B	18' 3"
			12	42	80	562	C	20' 3"
			14	42	80	659	D	22' 3"
			15	42	80	707	D	23' 3"
			16	42	80	756	D	24' 3"
E	81	93 1/2	12	42	87 1/4	609	C	20' 3"
			14	42	87 1/4	714	D	22' 3"
			15	42	87 1/4	767	D	23' 3"
			16	42	87 1/4	820	D	24' 3"
F	84	86 1/4	12	42	80	583	C	20' 3"
			14	42	80	684	D	22' 3"
			15	42	80	734	D	23' 3"
			16	42	80	784	D	24' 3"
G	84	93 1/2	12	42	87 1/4	633	C	20' 3"
			14	42	87 1/4	741	D	22' 3"
			15	42	87 1/4	796	D	23' 3"
			16	42	87 1/4	850	D	24' 3"

1. Body Code designates height and width combination of load area.

2. For body with roll-up door: subtract 4 in. from height.

3. Load length is defined as a true cargo floor length starting 1 1/4 in. behind the back edge of the step well (sta. O)

4. 48 in. for single tired rear axle.

5. Chassis Groups:

B. P20 Chev./GMC 125 in. WB.
P350 Ford 122 in. WB.

C. P30 Chev./GMC 133 in. WB.
P400 Ford 137 in. WB.

D. P30 Chev./GMC 157 in. WB.
P400 or 500 Ford 154 in. WB.

June 15, 1976 All specifications and prices are subject to change without notice.