

*standard*

*specifications*

Every Airstream is built to the same precise construction standards.

Chassis, running gear, body design


and basic equipment are uniform on all Airstreams, regardless of model or series. All Airstreams have 12-V electric brakes on every wheel. All are completely self-contained... they have equipment necessary for extended stays away from light, water and sewer connections. The difference between the Land Yacht and the International Land Yacht series is in the degree of self-containment, amount of accessory equipment included and quality of interior furnishings. The Land Yacht series comes equipped with an automatic water system (including Univolt marine water pump and 30 gallon polyethylene water tank); a water level gauge; Univolt electrical system to provide power at all times to all interior lights and fans (in addition to the 110-V wiring for convenience outlets); 12-V battery; a battery charger with a protective voltage regulator; two five-gallon gas bottles; combination electric/gas refrigerator; stainless steel galley sinks; gas water heater; marine-type toilet with spray flushing device to conserve water; a polyethylene holding tank to provide toilet convenience away from a sewer hook-up. The International Land Yacht series represents the ultimate in travel completeness and luxury. In addition to the basic Land Yacht equipment, it includes: two 7 gallon gas bottles; an automatic switchover; exhaust fan; two 12-V outlets for shaver and other appliances; central control panel (includes battery condition meter, ammeter, car battery automatic disconnect, water pump indicator light, water level gauge, holding tank gauge, T.V. jack and polarity light); a large, adjustable no-draft translucent Astrodome vent; two sink covers with cutting boards; deluxe plumbing hardware; double reflector tail lights; bedroom wall comfort cover; attractive bedspreads for fixed beds; luxurious deep pile, continuous filament nylon carpet in all areas except the bathroom; and deluxe hubcaps.

- Patented Air-Flow contoured shape
- Exclusive Aero-Stress® high-strength steel undercarriage
- Molded steel bumper, welded to undercarriage
- Exclusive super Dura Torque® rubber torsion bar axles
- Shock absorbers on all wheels
- Tandem wheels on 24' Trade Wind; 26' Overlander; 28' Ambassador and 30' Sovereign of the Road
- 12-V electric brakes on all wheels—can be coordinated with foot brake pedal in car
- Automatic electric break-away switch
- 7:00 x 15 Truck-type extra strength wheels with nylon tubeless tires (8-ply on all single axles; 6-ply on tandem axles); 7:75 x 15 4-ply tubeless tires on 17' Caravel
- Hand riveted double-shell body of heat treated structural alloy aluminum
- Exterior protective acrylic coating
- Wear-resistant vinyl surface laminated to metal interior walls in all models
- Ribs of stretch-formed structural alloy aluminum
- Contoured aluminum window frames, riveted to body
- Contoured, awning-type, safety glass windows
- Corrosion-proof removable screens in all windows (slip-in storm windows available at extra cost)
- Front window guard of transparent butyrate
- Insulated, unitized door and screen door
- Exclusive touch-control fold-away steel step, welded to frame
- Polished aluminum grab handle
- Trunk compartment with lock and insulated door
- \*Rear service area for storage of water line, 110-V power cord, 12-V battery, and septic tank valve
- \*Univolt convenience light in rear service area
- \*Awning rail
- Seamless, dustproof, high impact Styrene wheel housing covers
- Adjustable, no-draft aluminum roof vents
- All-over 2 1/4 inch aircraft type fiberglass insulation
- Plastic grip on jack handle
- \*Weatherproof exterior 110 volt outlet
- Single plug weatherproof car-trailer connector (includes 12 volt charge line)
- \*T.V. lead-in wire in shell
- Univolt service available at all roof vents
- Built-in 110 volt service line (25 feet)
- U.S.A.S.I. and D.O.H. Code-approved wiring system
- Interior 110 volt convenience outlets
- Three-position Univolt interior lights (operate on 110 volt or 12 volt current)
- Oversized 90 ampere hour 12 volt battery in vented case (except on 17' Caravel with 72 ampere hour 12 volt battery)
- Battery charger with protective voltage regulator
- Automatically resetting circuit breakers on Univolt and Univolt wiring system
- Overload safety fuse cartridges on Univolt wiring system
- Circuit breakers on 110 volt wiring system
- Two bulb, corrosion-proof 180° visibility exterior clearance and running lights
- Exterior clearance and running lights and reflectors installed in conformance with the Federal Motor Vehicle Safety Standards, effective January, 1968.
- High volume water pressure regulator in water inlet line
- Univolt marine water pump (capacity 3 gallons per minute)
- 30 Gallon polyethylene water tank
- Water level gauge on water tank
- U.S.A.S.I. and D.O.H. Code approved plumbing system
- Swing faucet at galley sinks (except in 17' Caravel)
- Double stainless steel galley sinks in all models (except 17' Caravel and 20' Globe Trotter with single stainless steel sink)
- Exclusive all-fiberglass penthouse bathroom
- Fiberglass bathtub in all models (except 17' Caravel which has Fiberglass "walk-thru" shower)
- Fiberglass lavatory
- Built-in medicine chest
- \*"Movie Star" mirror with Univolt lights
- Imported water-saver "telephone" shower with shut-off valve
- Toilet hand spray flushing device
- Marine type toilet
- Polyethylene holding tank of approximately one week capacity
- Drainage drop-out cover cap
- Drainage drop-out elbow for connecting sewer hose
- Built-in sewer hose carrier
- All gas equipment U.L. or A.G.A. approved for use in travel trailers
- Double five gallon gas bottles with rack
- U.S.A.S.I. and D.O.H. Code approved gas system
- Sealed unit, side-vented gas space heater (input ratings: 17' Caravel, 9600 B.T.U.; 20' Globe Trotter, 16,000 B.T.U.; 22' Safari, 24' Trade Wind, 26' Overlander, 22,500 B.T.U.; 28' Ambassador, 30' Sovereign of the Road, 30,000 B.T.U.)
- Automatic heater thermostat in all models
- Automatic lighter for space heater in all models 22' and longer
- Univolt blower and under-the-floor circulating ducts on all models 22' and longer
- 5.5 cubic foot combination electric/gas refrigerator (except in 17' Caravel with 2 cubic foot gas refrigerator and 20' Globe Trotter with 3.5 cubic foot electric/gas refrigerator)
- Gas range with oven and broiler
- Range vent hood
- Ten gallon gas water heater (except 17' Caravel with 7 gallon gas water heater)
- Genuine hardwood veneer furniture and cabinets (natural ash in Land Yacht series... American walnut in International series)
- Lightweight, warp-free hollow core wardrobe doors
- Travel-sure locks on all roof locker doors and cabinet doors
- Drawers of lightweight molded high-impact Styrene
- Variable storage for all drawer areas (can be used for drawers, as shelves or as open storage)
- \*Enclosed towel-drying storage
- Silverware drawer
- Front end roof cabinet
- Credenza fold-away table with built-in extension leaf (except in 22' Safari Twin and 24' Tradewind Twin and pull-out table)
- Foam travel lounge in front, convertible to double bed (except in 22' Safari Twin and 24' Tradewind Twin and twin lounge beds in front)
- 6" Foam mattresses with zippered covers
- All upholstery treated with SCOTCHGARD Repeller to resist soiling
- All curtains vat dyed, fade resistant and pre-shrunk
- \*All curtains lined
- Decorator-styled, washable vinyl window shades at galley and bathroom windows
- \*Full-length mirror
- Slide-away hollow core bathroom door (except in 17' Caravel which has vinyl folding door)
- Bedroom vinyl folding door in 24' double bed model and larger
- Vinyl floor tile
- Outside floor width... 7' 4"
- Outside height from ground... 8' 10" (8' 8" in Caravel)
- Inside height (floor to ceiling) 6' 7"
- Ground clearance... 16" to underbelly, 12.24" to axle tube (14.65" to underbelly and 11" to axle tube in Caravel)
- Recommended hitch ball height... 19" (17 1/2" in Caravel)

\*Not available in Caravel  
All specifications subject to change without notice.

# Airstream Floor plans


The 1968 Airstream fleet offers you a wider selection than any other travel trailer... 12 exciting models, raring and daring to go. One is meant for you!

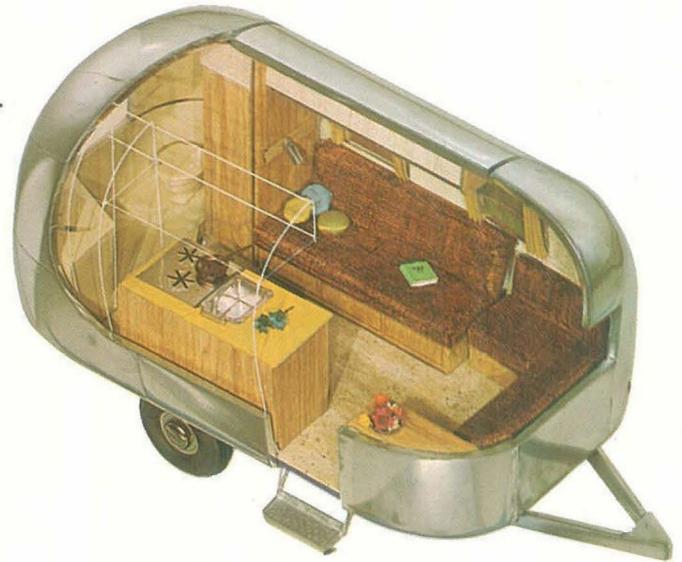

**17 FT. CARAVEL** Hitch Wt. 330 lbs. • Total Wt. 2460 lbs.




**20 FT. GLOBE TROTTER** Hitch Wt. 370 lbs. • Total Wt. 2990 lbs.

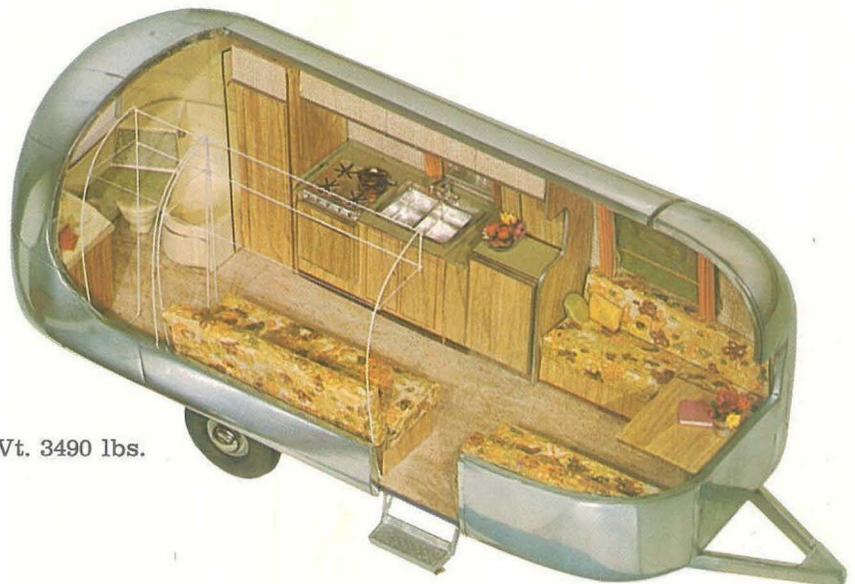

**22 FT. SAFARI TWIN** Hitch Wt. 400 lbs. • Total Wt. 3490 lbs.

**22 FT. SAFARI DOUBLE** Hitch Wt. 400 lbs. • Total Wt. 3490 lbs.

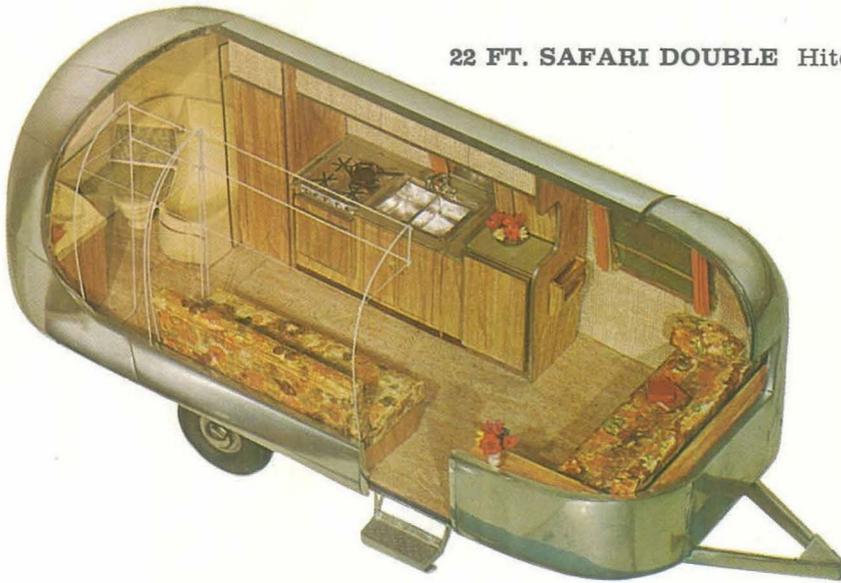


**24 FT. TRADE WIND TWIN** Hitch Wt. 445 lbs. • Total Wt. 3985 lbs.




**24 FT. TRADE WIND DOUBLE** Hitch Wt. 445 lbs. • Total Wt. 3985 lbs.




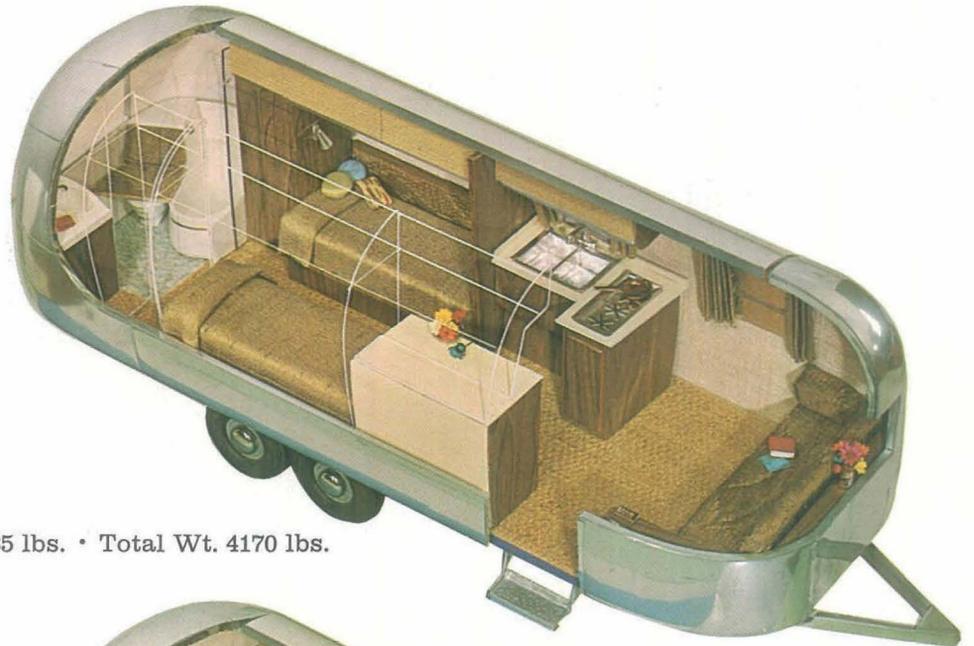

**26 FT. OVERLANDER TWIN** Hitch Wt. 435 lbs. • Total Wt. 4170 lbs.

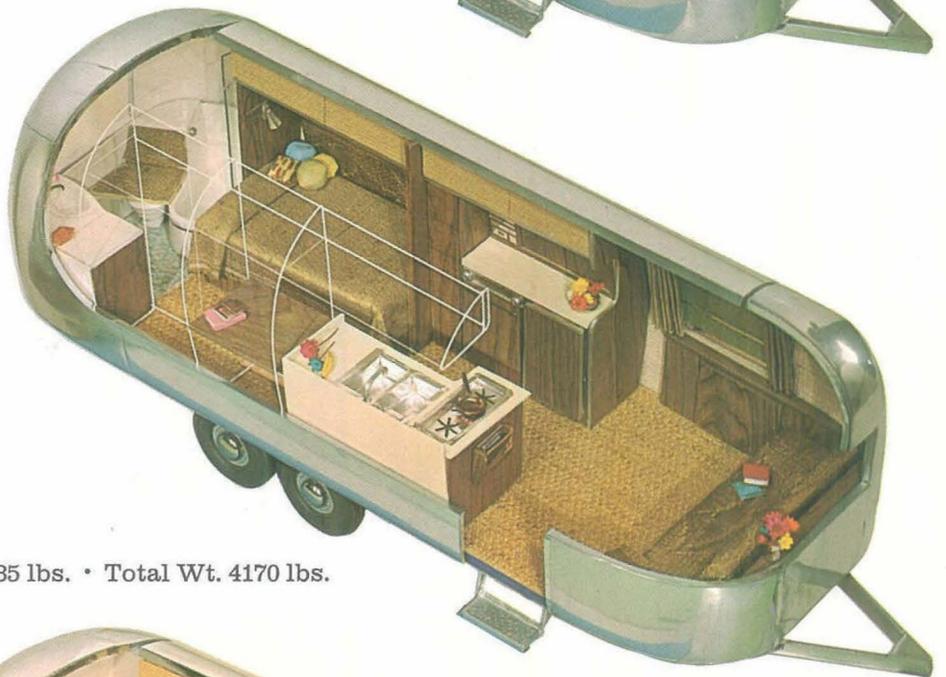


**26 FT. OVERLANDER DOUBLE** Hitch Wt. 435 lbs. • Total Wt. 4170 lbs.

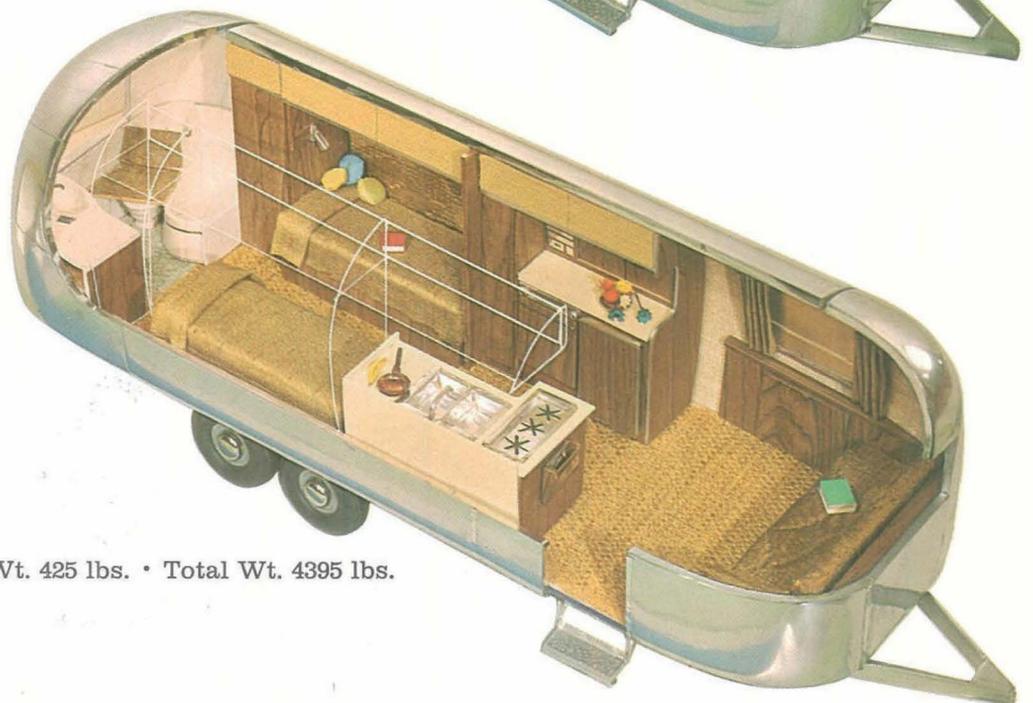


**28 FT. AMBASSADOR TWIN** Hitch Wt. 425 lbs. • Total Wt. 4395 lbs.

**28 FT. AMBASSADOR DOUBLE** Hitch Wt. 425 lbs. • Total Wt. 4395 lbs.

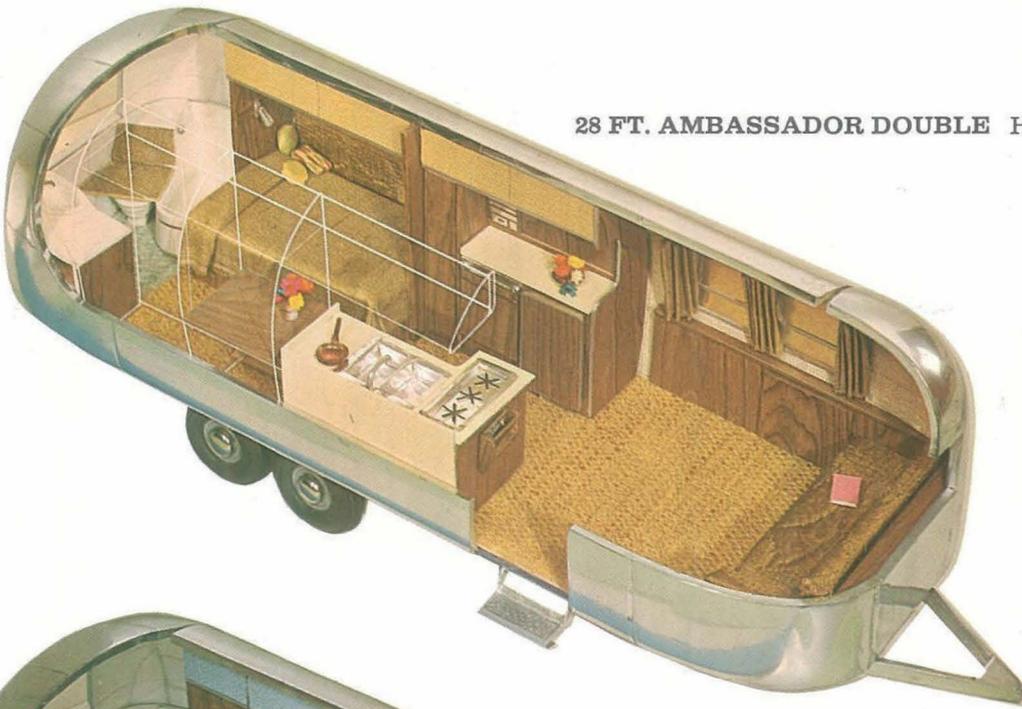

**30 FT. SOVEREIGN TWIN** Hitch Wt. 415 lbs. • Total Wt. 4640 lbs.

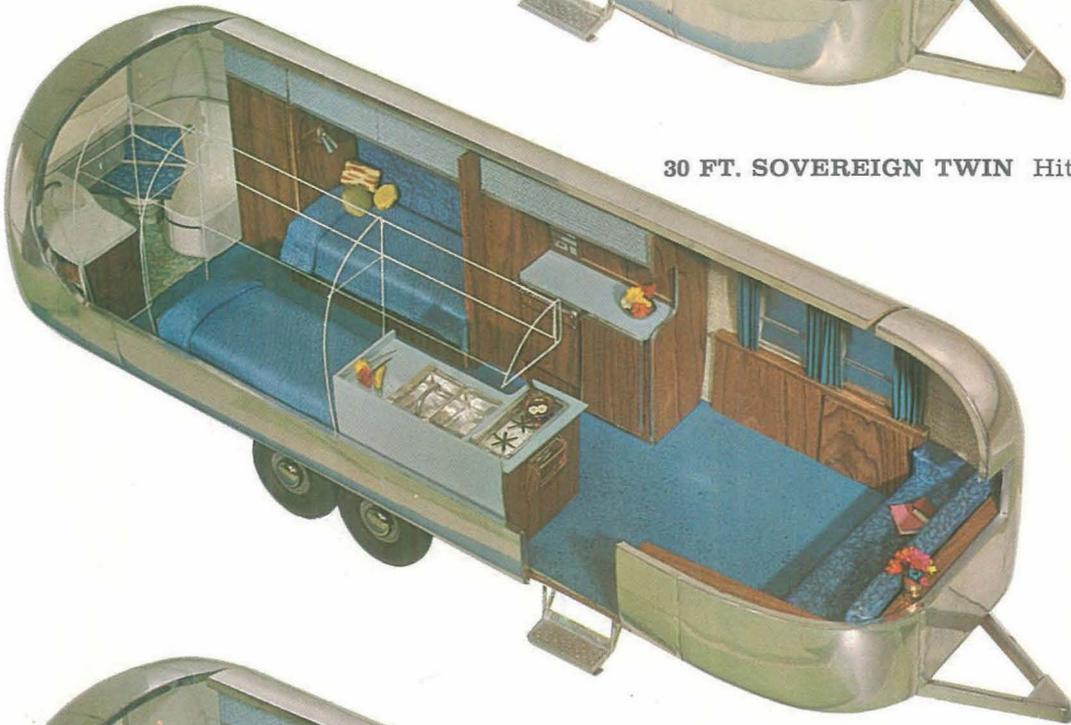

**30 FT. SOVEREIGN DOUBLE** Hitch Wt. 415 lbs. • Total Wt. 4640 lbs.

