

1975 model

STANDARD ROMANY SPECIFICATIONS

BASIC CONSTRUCTION:

Patented Air-flow contoured shape
 Exclusive Aero-Stress high-strength steel undercarriage
 Extruded aluminum bumper
 Dura-Torque torsion bar axles
 Shock absorbers on all wheels
 Tandem wheels
 12 volt electric brakes on all wheels — can be coordinated with foot brake pedal in car
 15" Truck-type extra strength wheels with 7:00 x 15 nylon tubeless tires
 Hand riveted monocoque shell of heat treated structural alloy aluminum
 Exterior protective acrylic coating
 Ribs of stretch-formed structural alloy aluminum
 Interior walls of wear-resistant vinyl laminated to aluminum
 One-piece stretch-formed extruded aluminum window frames riveted to body
 Exclusive contoured jet-Seal awning-type Herculite safety glass windows
 Super strength double paned front window (Herculite safety glass)
 Corrosion-proof screens in all windows
 Exclusive touch-control fold-away aluminum entrance step
 Awning rail
 Double-walled fiberglass insulated wheel wells
 2 1/4 inch aircraft type fiberglass insulation
 Adjustable no-draft aluminum roof vents

ELECTRICAL EQUIPMENT:

A.N.S.I., D.O.H. and C.S.A. Code-approved wiring system
 Detachable single-plug weatherproofed car-trailer connector (includes 12 volt charge line)
 Two-bulb, corrosion-proof 180° visibility exterior clearance and running lights (installed in conformance with Federal Motor Vehicle Safety Standard 108)
 Automatic electric break-away switch
 Back-up lights
 Built-in 110 volt service line (25 feet)
 Extra-capacity 105 ampere hour 12 volt battery in built-in, sealed and vented battery compartment
 Three-position Univolt ceiling lights combined with ceiling vents
 Exclusive, one knob variable position ceiling vents
 Exclusive ferro resonant Univolt to convert 110 volt city power to 12 volt direct current power and automatically charge battery
 Overload safety fuse cartridges in Univolt wiring system
 Circuit breakers on 110 volt wiring system

PLUMBING:

A.N.S.I., D.O.H. and C.S.A. Code-approved plumbing system
 High volume water pressure regulator in water inlet line
 Lockable, flush water fill
 Univolt marine pump (capacity 3 gallons per minute)
 45 Gallon polyethylene water tank

Swing faucet at double galley sinks
 Stainless steel galley sinks
 Exclusive all thermo-formed bathroom with bathtub
 Built-in medicine chest and mirror
 Panoramic roof lockers with roll-away doors
 Water-saver "telephone" shower
 Mechanical seal, flush toilet
 Polyethylene holding tank of approximately one week capacity
 Drainage drop-out cover cap
 Drainage drop-out elbow for connecting sewer hose
 Built-in sewer hose carrier

GAS EQUIPMENT:

A.N.S.I., D.O.H. and C.S.A. Code-approved gas system
 All gas equipment U.L. or A.G.A. and C.S.A. approved for use in travel trailers
 Double five gallon gas bottles with rack
 Sealed, outside vented, forced air gas space heater
 Automatic heater thermostat
 Built-in igniter for space heater
 Univolt blower and circulating ducts
 Gas/electric combination refrigerator
 Gas range with oven and broiler
 Range vent hood
 6 gallon gas water heater
 Built-in igniter on gas water heater


FURNISHINGS:

Exclusive Perma-Tech furniture construction featuring heat-treated, color-anodized aluminum framework
 Lightweight warp-free hollow core doors
 Roll-away cabinet and roof locker doors
 Post-lock latches on all cabinet doors
 Drawers of lightweight high-impact styrene
 Silverware drawer
 Credenza fold-away table in all models with front travel lounge
 Six inch foam mattresses in bedroom with zippered covers
 Carpeting in all areas
 All upholstery treated with SCOTCHGARD repeller to resist soiling
 All draperies fade resistant and pre-shrunk
 All draperies lined
 Slide-away bathroom door
 Bedroom vinyl folding door


DIMENSIONS:

Outside floor width ... 7'8"
 Outside height from ground ... 8'10"
 Inside height (floor to ceiling) ... 6'7"
 Ground clearance ... 16" to underbelly, 12.24" to axle tube
 Recommended hitch ball height ... 19 1/2"

All specifications subject to engineering change without notice.

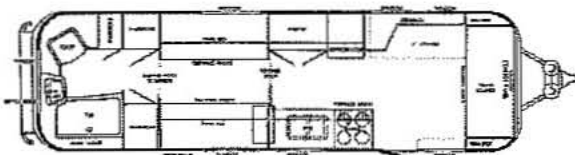

31' TWIN

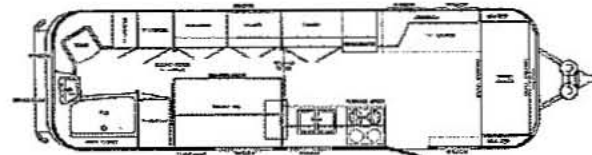

31' DOUBLE